



Equipment sheet

GB

Fireplace stove with exchanger

Visby II with exchanger

0434517511402–

Introduction

We thank you very much for purchasing our product!

The description of the heating device will inform you in detail about the design, technical specification and operation of the heating device. We recommend you to acquaint yourselves closely with these data. In this way, you will avoid possible faults during the proper assembly and operation.

You will find detailed conditions of installation and operation in General Manual of Operation (included in the scope of the delivery).

Notes in the text

GB



Of utmost importance there are the notes entitled **WARNING**. The notes entitled **WARNING** advise you on **serious danger of damage to the heating device or of an injury**.



The note entitled **Notice** advises you on possible damage to your heating device.



The note entitled **Important** calls your attention to the information important for the operation of your heating device.




The note itself calls your attention to the information important for the operation of your heating device in general.

Contents


1. Technical description	1
2. List of spare parts	2
2.1. Overall scheme of the model	2
2.2. Detail A1	4
2.3. Detail A2, A3, A4, A5	6
3. Dimensioned diagram	8
3.1. Connection of the exchanger	8
4. Easy control	9
5. Ignition flap	10
6. Installation of the coolant loop	11
7. Instructions for cleaning of the exchanger	12

1. Technical description

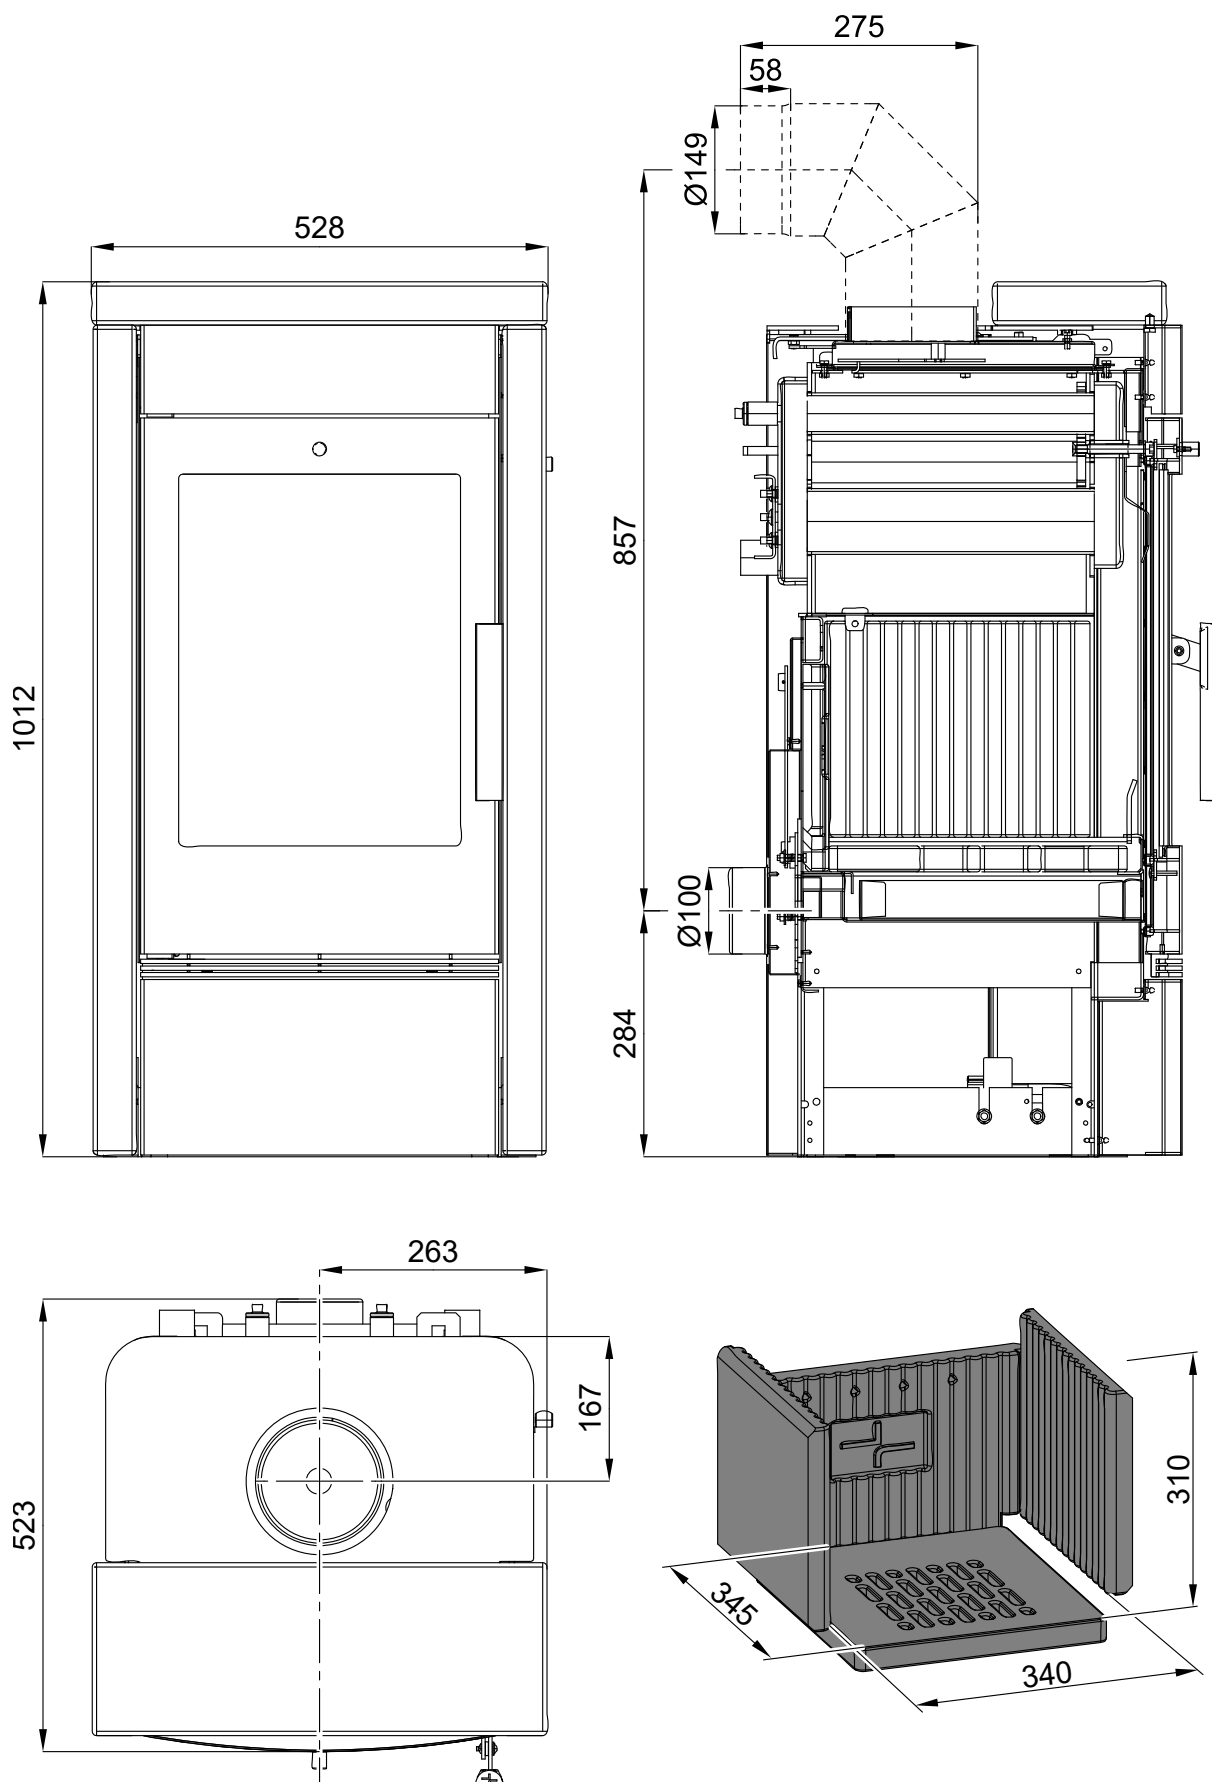

2. List of spare parts


2.1. Overall scheme of the model

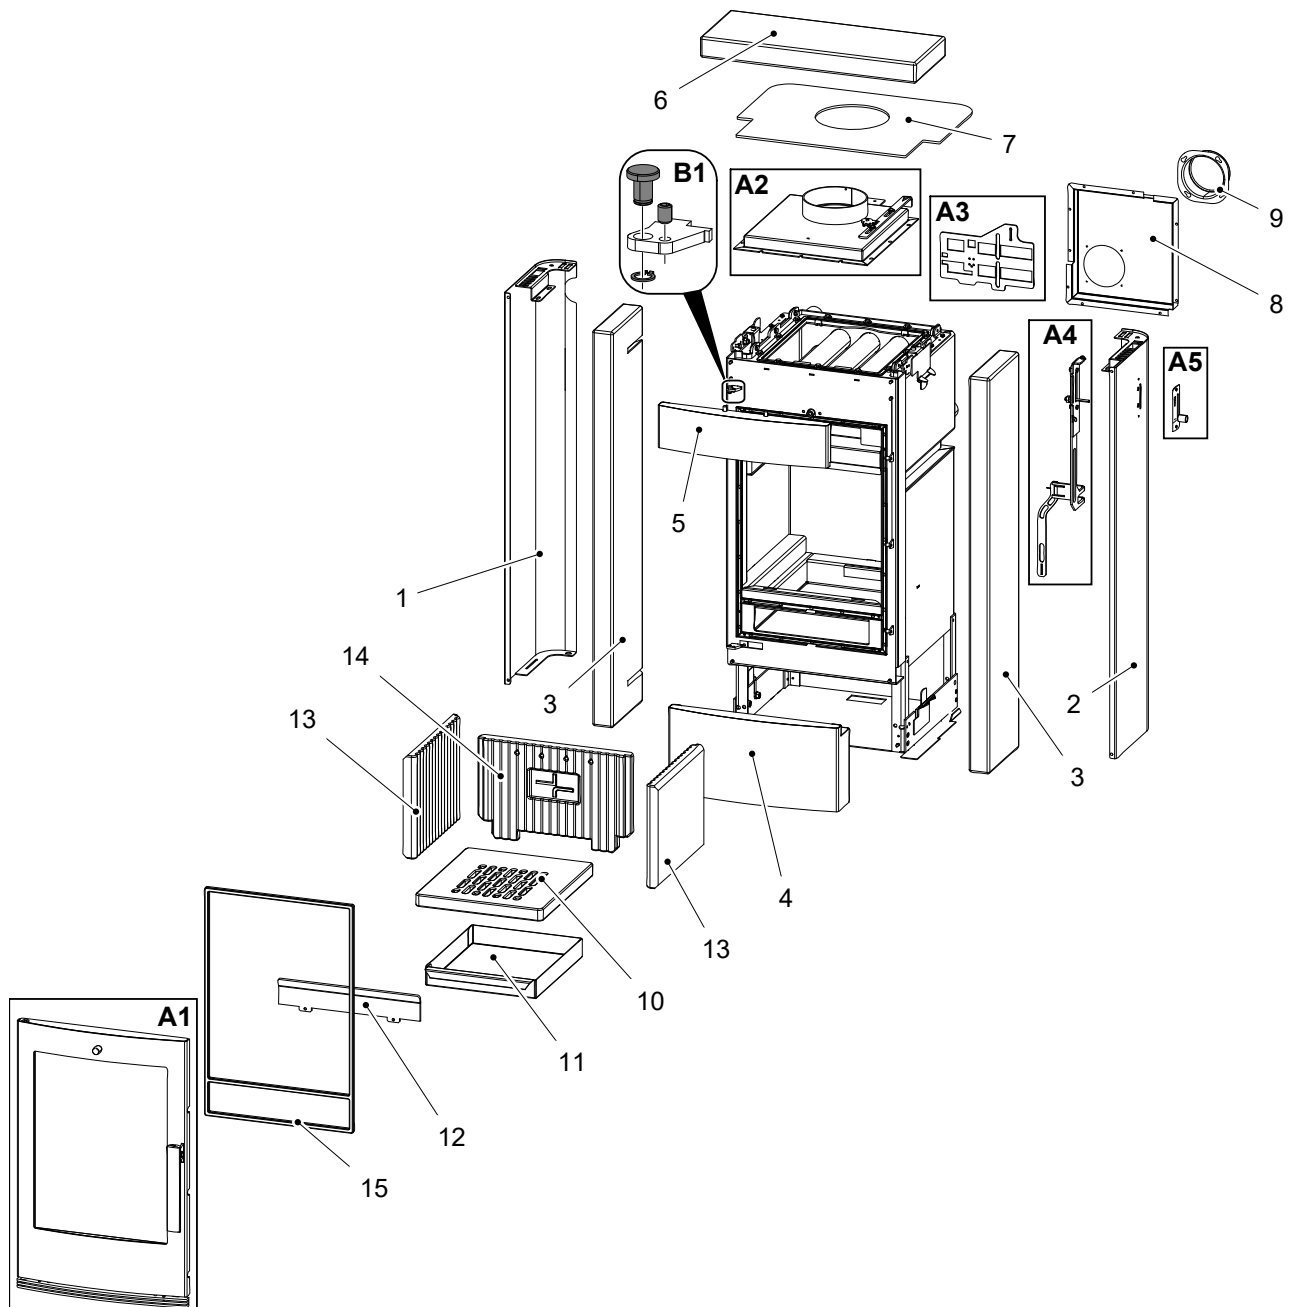

Item	Name	Quantity	Number of goods
Overall scheme of the model			
A1	Fire-box door (complete)/black-silver	1 piece	0434515005300
A2	Lid (complete)/black	1 piece	0434515015095
A3	Sliding valve (complete)/black	1 piece	0434617005027
A4	Control (complete)/Easycontrol	1 piece	0434517005060
A5	Controller (complete)	1 piece	0434615005005

B1	Hinge connecting material — set	1 piece	0434515005128
1	Lateral cover — left/black	1 piece	0434515105019
2	Lateral cover — right/black	1 piece	0434515105018
3	Lateral lining/Woodstone	2 piece	0434515106100
4	Lower cover/black	1 piece	0434515015146
5	Upper cover/black	1 piece	0434515015145
6	Upper lining/Woodstone	1 piece	0434515106200
7	Top cover/black	1 piece	0434515007801
8	Rear cover	1 piece	0434517005000
9	External air input (Ø100)	1 piece	0088500050008
10	Grate/lackfire	1 piece	0434515005053
11	Ashpan	1 piece	0434515005030
12	Protection/black	1 piece	0434515005040
13	Refractory lining — right+left (30x250x307)	2 piece	0434617005504
14	Refractory lining — rear (30x239x375)	1 piece	0434617005501
15	Door sealing cord 10 mm	2500 mm	0040300100005


2.2. Detail A1

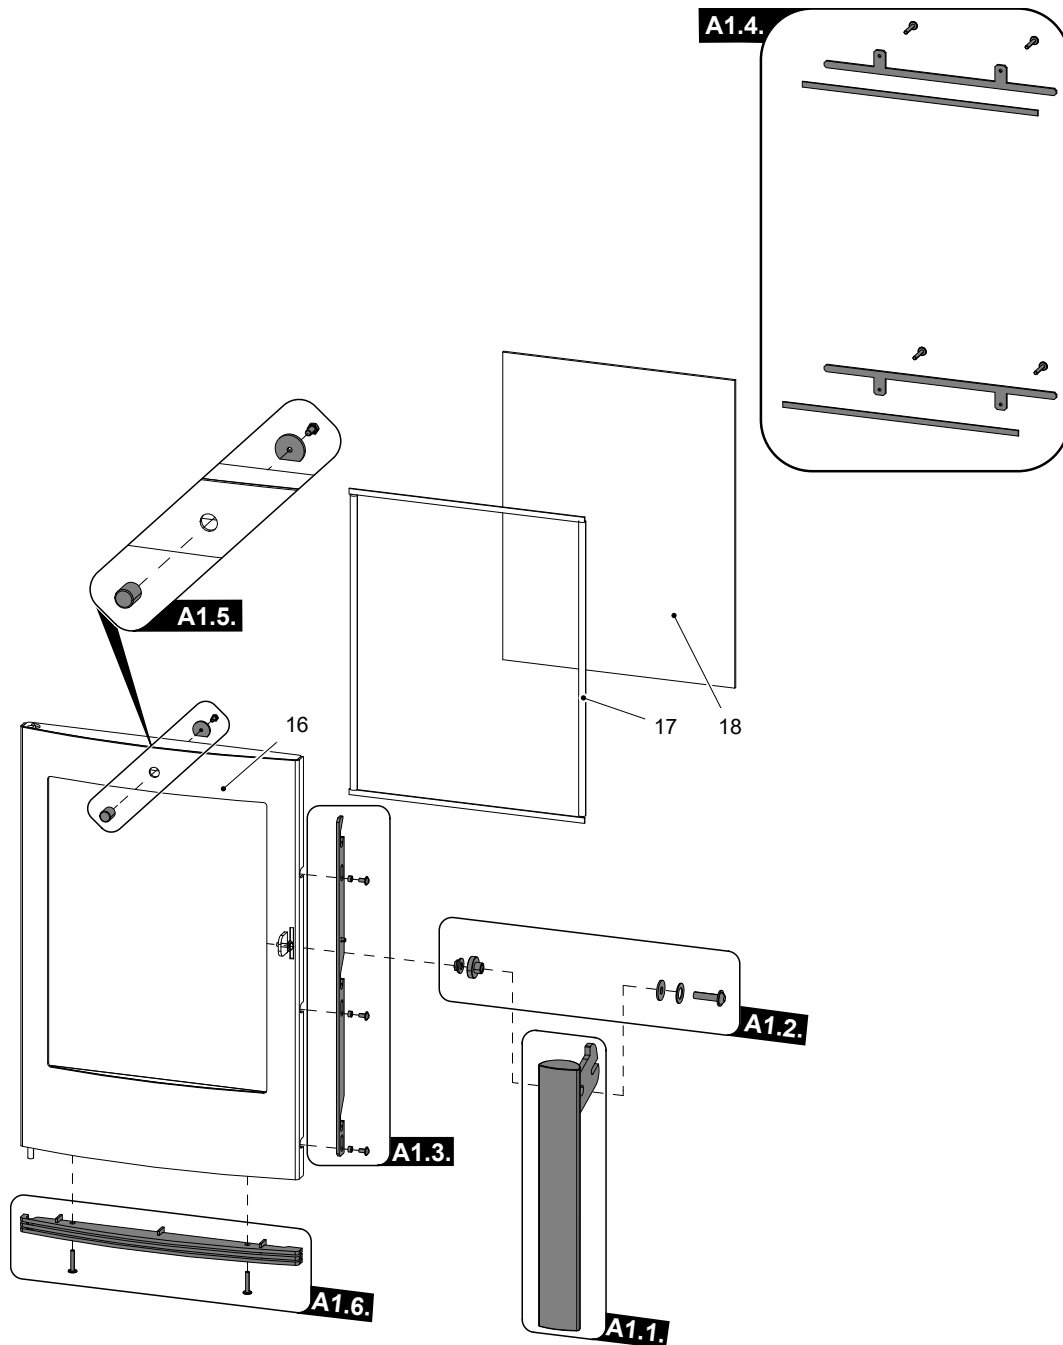

Item	Name	Quantity	Number of goods
Detail A1			
A1.1.	Fire-box door lever lock (complete)	1 piece	0429415005318
A1.2.	Handle connecting material — set	1 piece	0434615505002
A1.3.	Closing mechanism drawbar — set	1 piece	0434615005321
A1.4.	Glass holder — set/black	1 piece	0434615005330
A1.5.	Cleaning cover — set/black	1 piece	0434515505005
A1.6.	Shutter/silver — set	1 piece	0434515005315
16	Fire-box door (welded part)/black	1 piece	0434515005200

17	Glass sealing cord — set (10mm, 8x2 mm)	1 piece	0435015105300
18	Refractory glass (345x455)	1 piece	0434515005304

2.3. Detail A2, A3, A4, A5

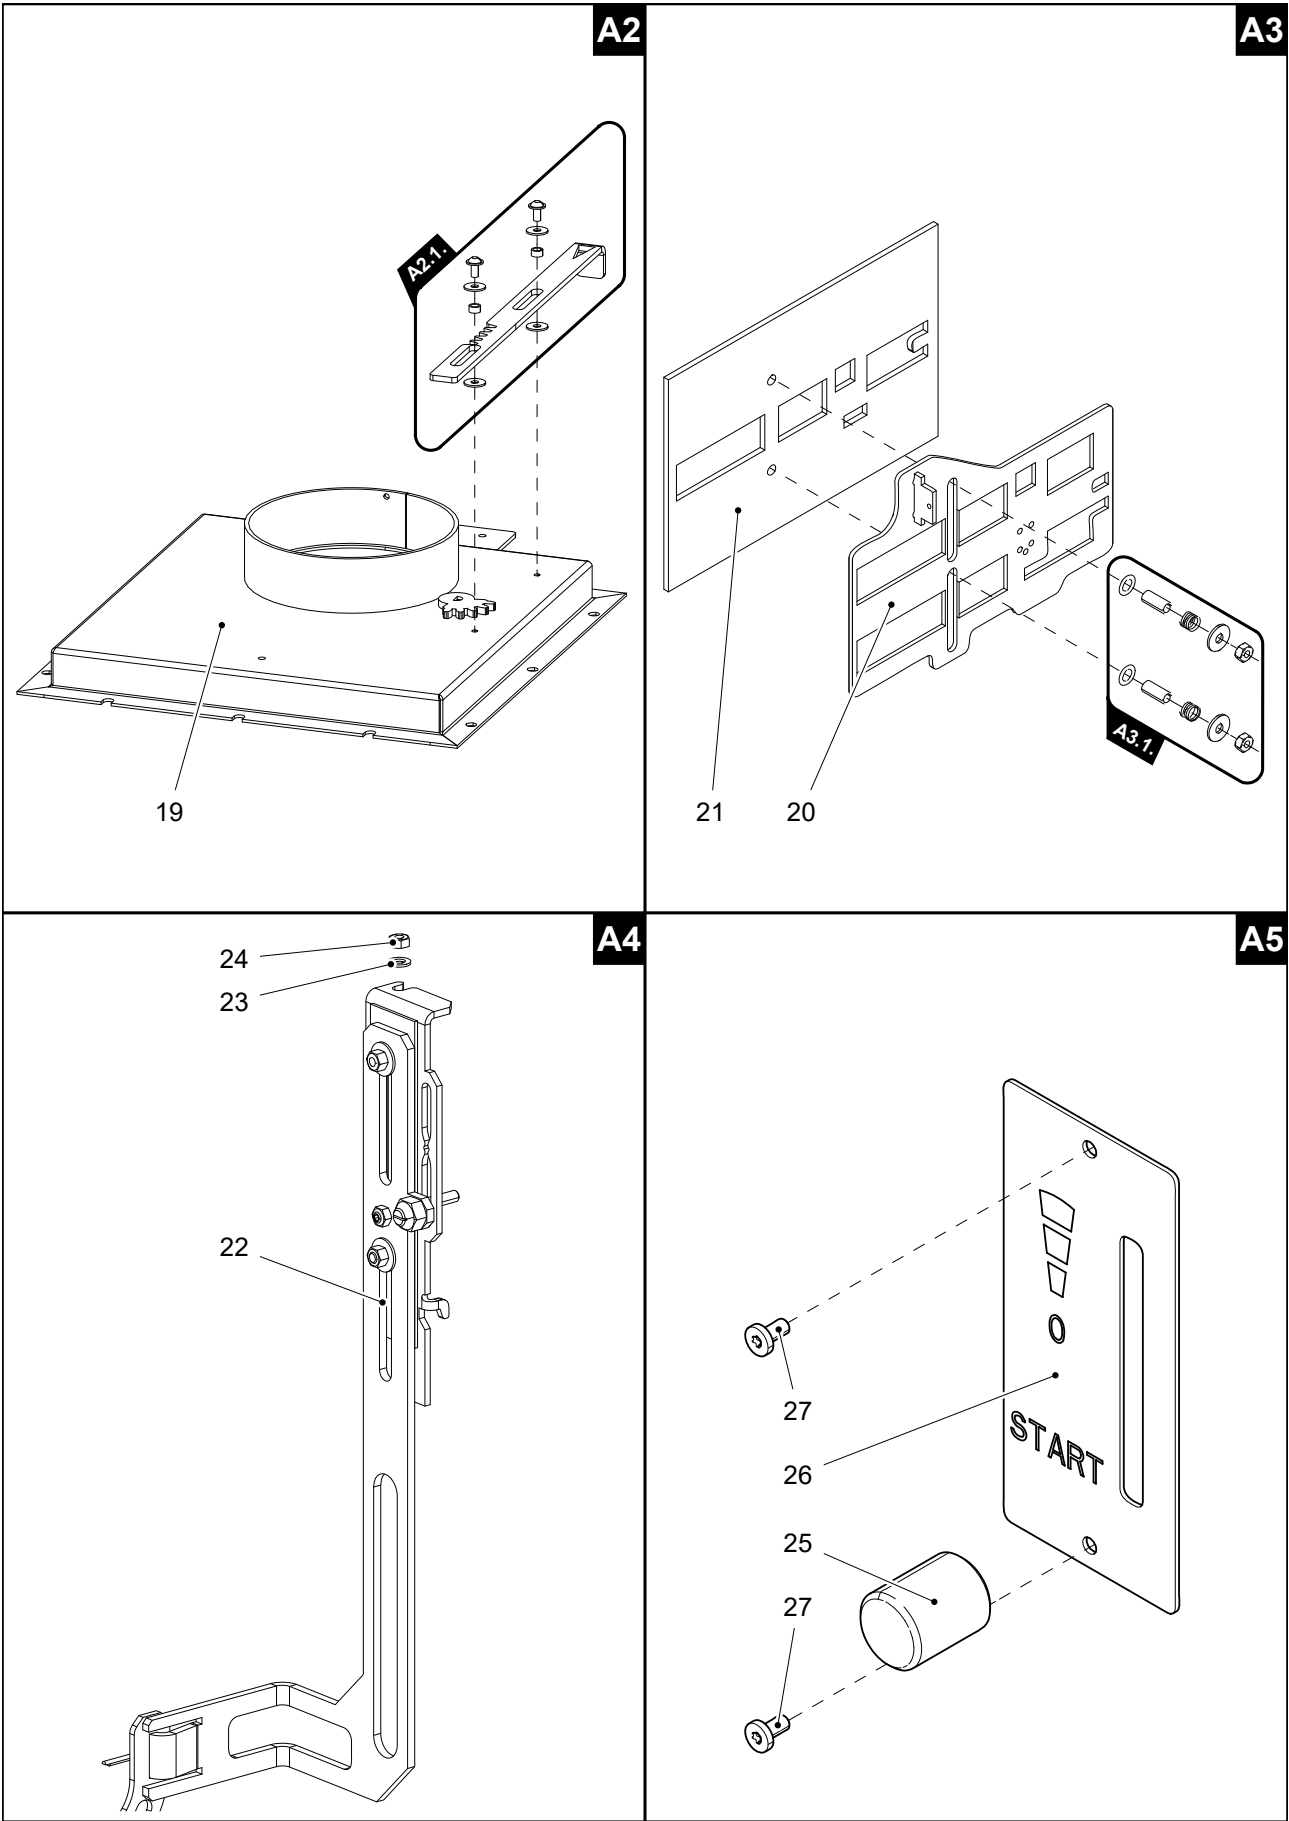


Detail A2			
Item	Name	Quantity	Number of goods
A2.1.	Flap drawbar/black — set	1 piece	0434515005088
19	Lid/black	1 piece	0434515015085
Detail A3			
Item	Name	Quantity	Number of goods
A3.1.	Sliding valve connecting material — set	1 piece	0434615005003
20	Sliding valve/black	1 piece	0434617007027
21	Sliding valve sealing	1 piece	0434517005052
Detail A4			
Item	Name	Quantity	Number of goods
22	Control/Easycontrol	1 piece	0434517005060
23	Washer 5.3 DIN 125A	1 piece	-
24	Nut M5 DIN 980V	1 piece	-
Detail A5			
Item	Name	Quantity	Number of goods
25	Controller	1 piece	0420915005625
26	Controller label	1 piece	0429415005171
27	Screw M3x10 BN 9524	2 piece	0030400300105

3. Dimensioned diagram

3.1. Connection of the exchanger

Dimensioned diagram

GB

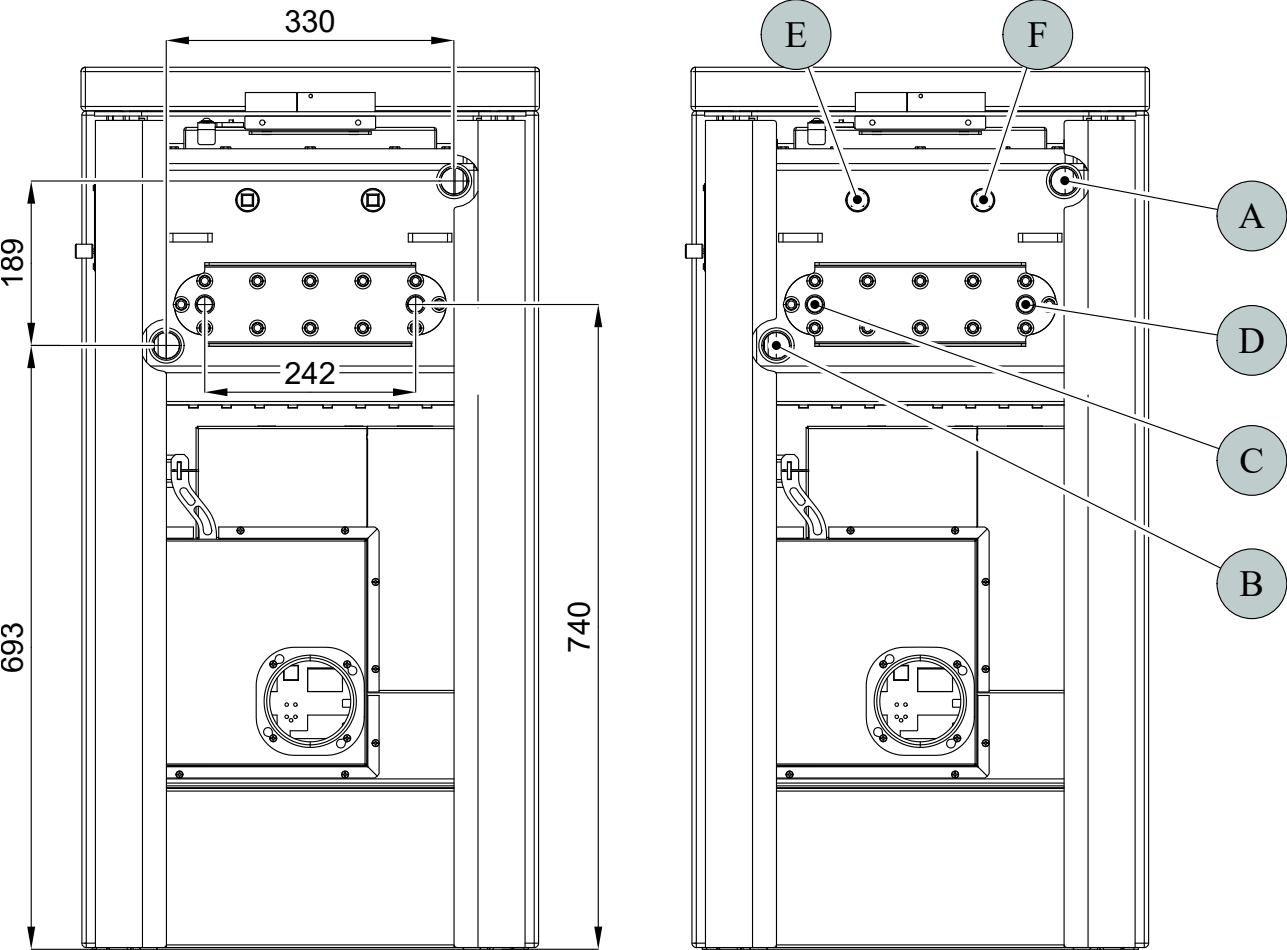

Item	Name
A	Forward flow connection (inside thread G1")
B	Reverse flow connection (inside thread G1")
C	Intake of cooling liquid (outside thread G1/2")
D	Outlet of cooling liquid (outside thread G1/2")
E	Hole for thermostatic sensor cup (inside thread G1/2")/cooling loop
F	Hole for thermostatic sensor cup (inside thread G1/2")/circulation pump

4. Easy control


Control of all three air inputs - primary, secondary, tertiary - by means of one sole controller.

1. The controller is in the position intended for ignition (fig. A). All three air inputs are open (primary, secondary, tertiary).
2. The controller is in the position intended for burning of the stove after ignition (fig. B). Two air inputs are opened only (secondary, tertiary).
3. The controller is in the position designed to close air inputs (Fig. C). No input is open (primary, secondary, tertiary). This position is used only when the stove is out of operation, after finishing the heating process.



WARNING

Air inputs may not be closed during the heating operation (Fig. C)! In an extreme case, there can occur an explosion in the stove followed by breaking of glass, blowing up of cinders across the room and breaking out of the fire.

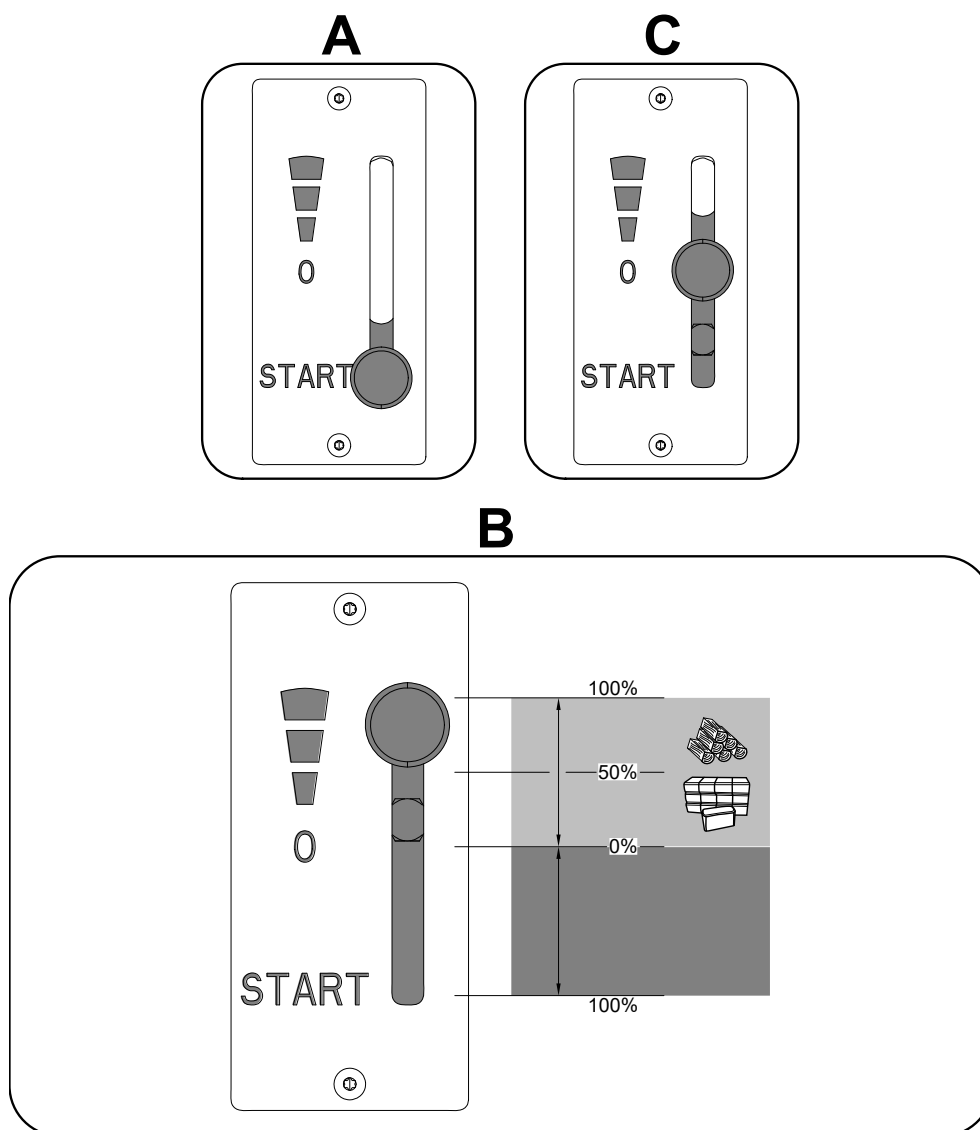

5. Ignition flap





IMPORTANT

When lighting the stove or if the stove has a weak draft, pull out the ignition flap controller to Position 0 (Fig. A). In this position, the ignition flap is open. During the heating, push the ignition flap controller to Position 1 (Fig. B). In this position, the ignition flap is closed.



Note

Keep in mind that heating efficiency is significantly reduced, the fuel consumption increases and emission parameters deteriorate when heating with the kindling vent open for a prolonged period of time!

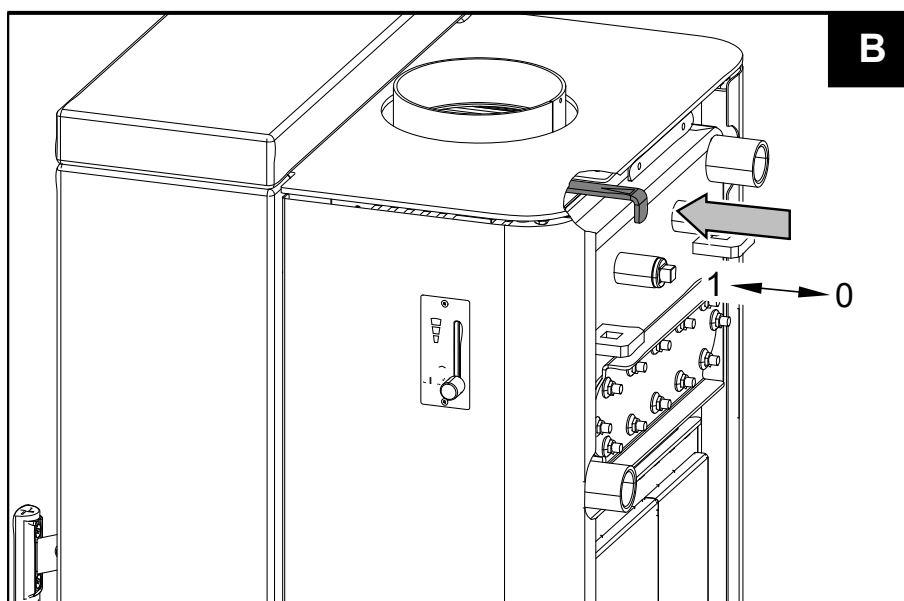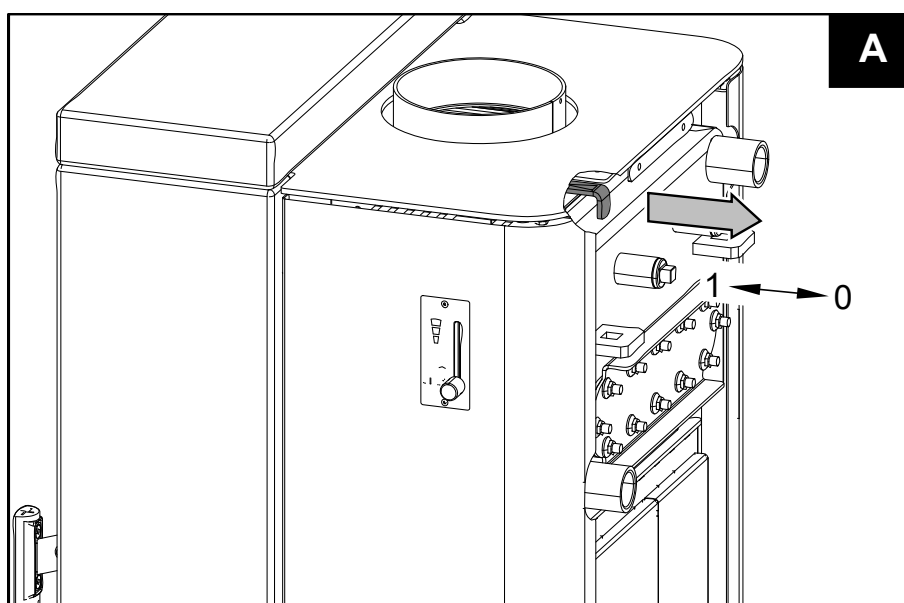


6. Installation of the coolant loop



IMPORTANT

Coolant loop not included in the scope of the delivery.

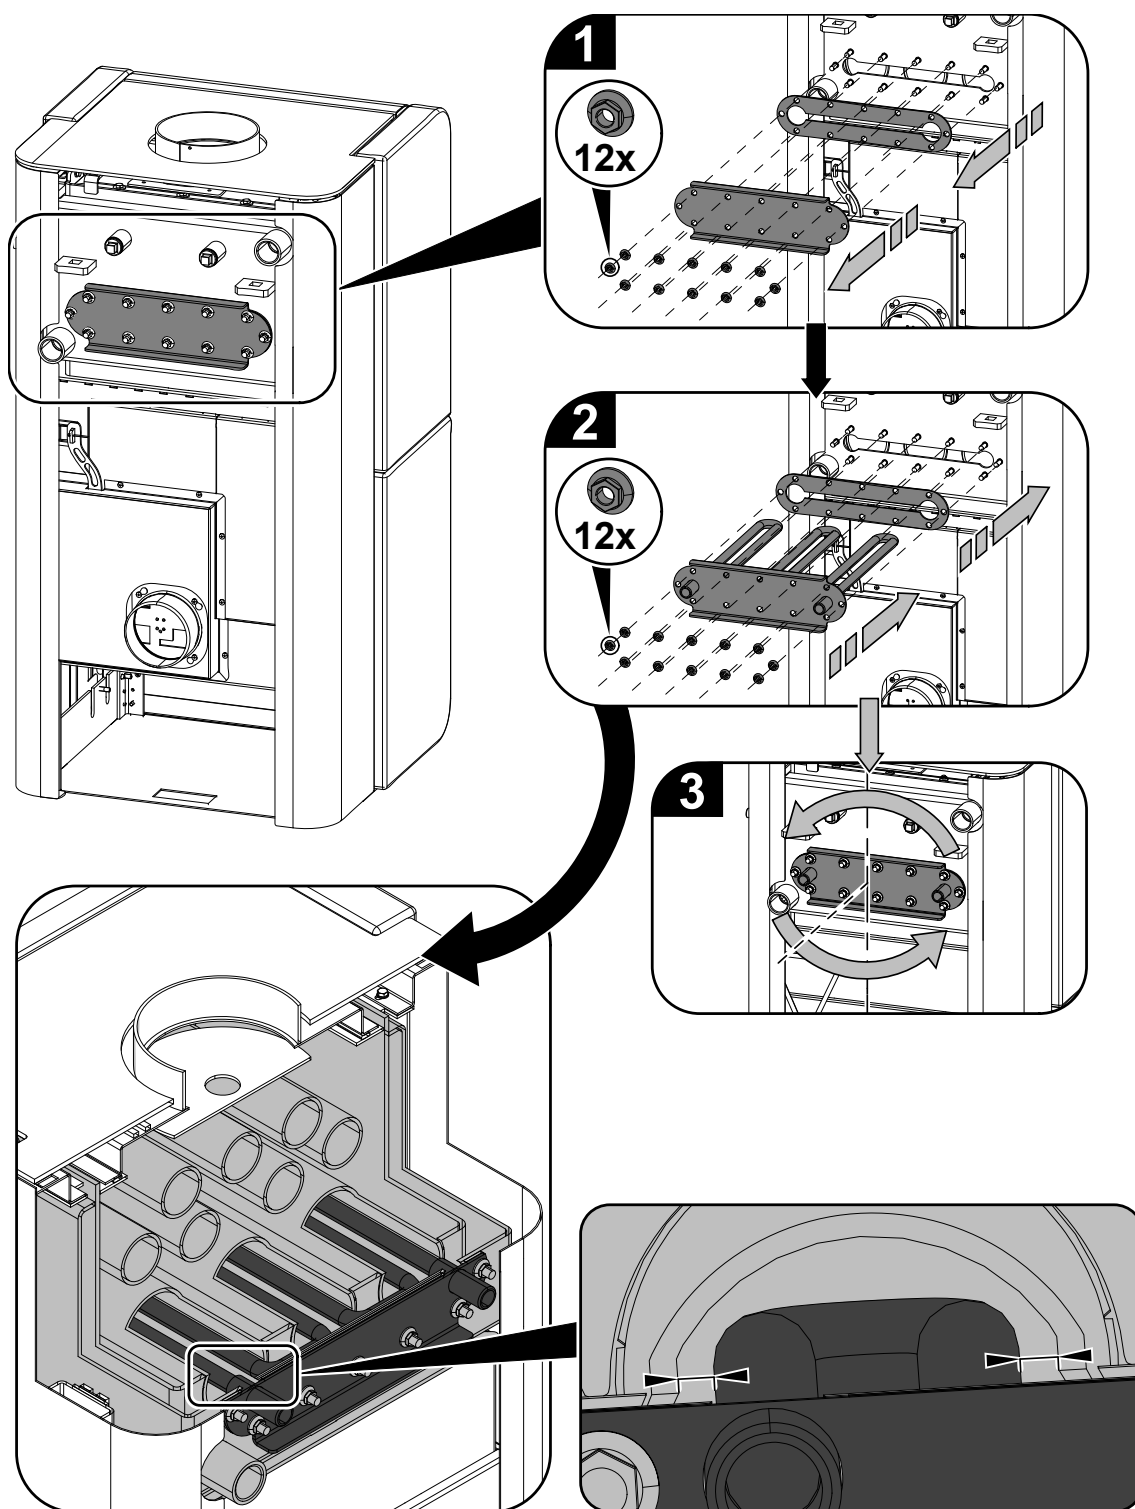


7. Instructions for cleaning of the exchanger



IMPORTANT

It is recommended to perform the cleaning by wiping blade (item 4, fig. 5) 1x in a week at least, or more often, depending on the manner of operation

1. Preparation and mounting of the cleaning drawbar.

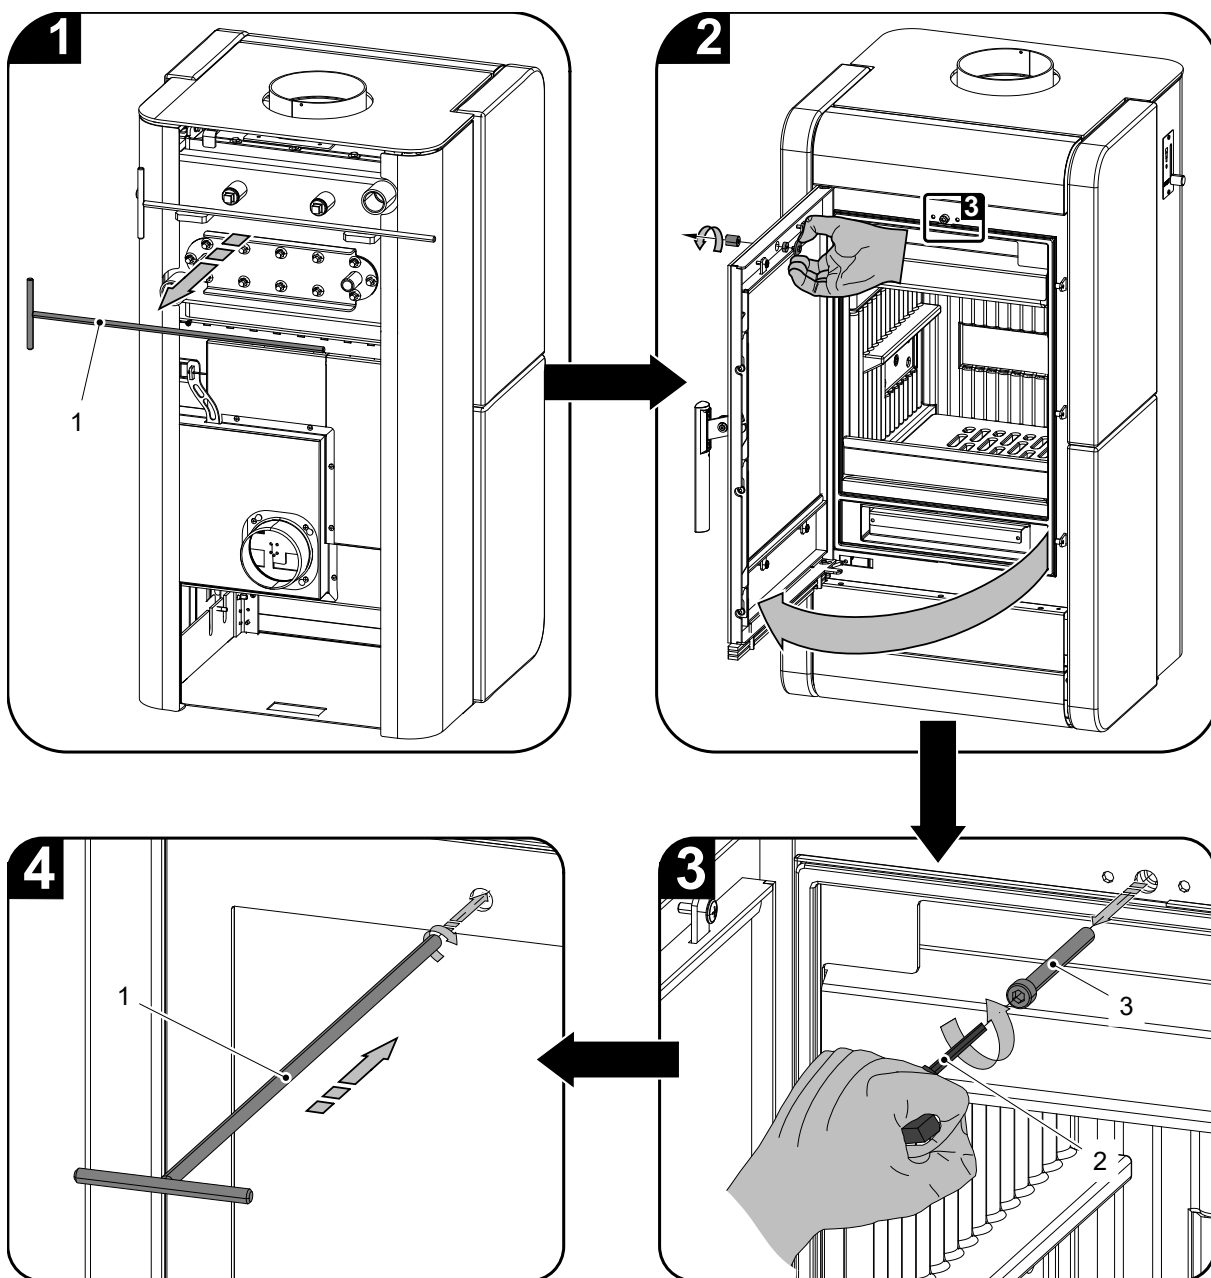


2. Proper cleaning and arrestment of the cleaning board.



IMPORTANT

Once the clearing is terminated, arrest the wiping blade always (fig. 5a). Do not leave the wiping blade above a flame (fig. 5b).

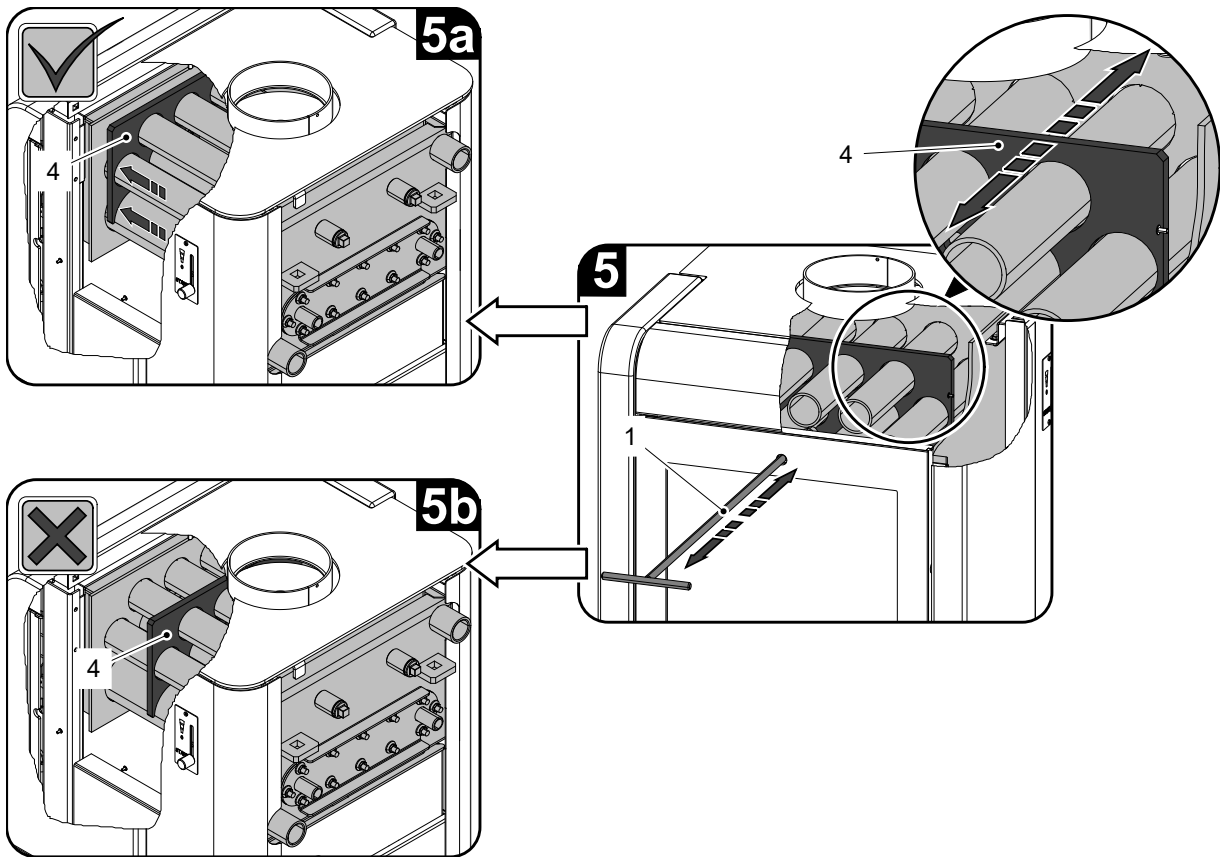

Item	Name	Number of the spare part
1	Drawbar of the cleaning/black	0433317005063
2	Allen wrench 8mm (forms part of the delivery)	9001700080005
3	Screw M10x80 (DIN 912)	0030031000805
4	Wiping blade	—

